Three Points



Towable Boom Lift

High - altitude operation Efficient lifting Safety - ensured
Flexible maneuverability Versatile application

THREE POINTS

Three Points

Prictures Show（Color can be customized）












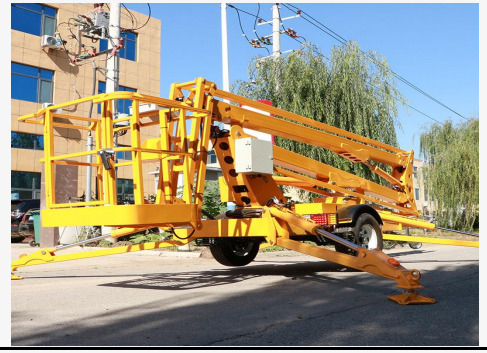


THREE POINTS

Three Points




The Advantages of our Towable Boom Lift

Germany Imported ALKO Brand Brakes	Honda Gasoline Engine(Optional)	Diesel Motor(Option)	Fuel tank (provided when choosing gasoline or diesel power)	Waterproof Electrical Box(Touch screen),Battery Power Indicator,Emergency Stop
				
Led light and Water Proof Control Panel on platform	Travel wheels and warning lights	Control Rod for 4pes Automatic Hydraulic Supporting Legs	**Friction wheel walking device**(optional)	Turntable hydraulic drive motor
				

THREE POINTS

Three Points


The Advantages of our Towable Boom Lift

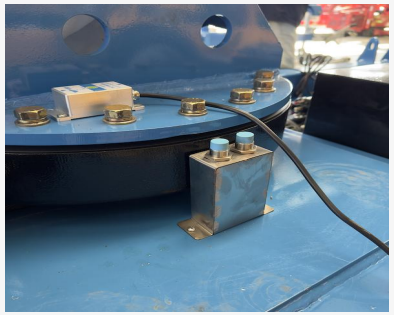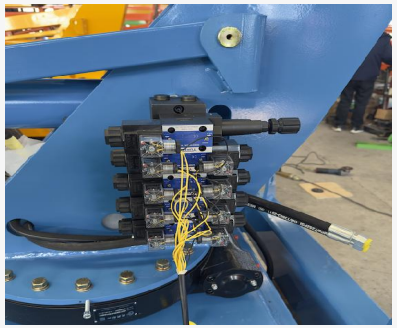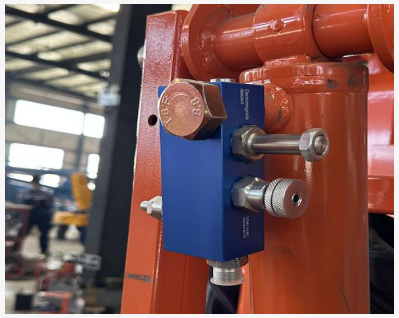Clean and Well-Organized Chassis – Clearly defined functional zones.	Durable Chassis Construction – Made of manganese steel square tubing for enhanced strength	High-Strength Manganese Steel Components – Other chassis connections use thick, reinforced steel.	Reinforced Rotational Support – High-strength channel steel supports the articulated arm and platform.	Optional: Standard Battery Model
				
Leg Balance Valve for Stability – Ensures balanced support legs for enhanced safety.	Optional: Lithium Battery Model	Electromagnetic & Hydraulic Valves – Regulate and control machine operations.	Master Switch & Electric Start – Centralized control for efficient operation.	Emergency Descent Valve – Allows manual lowering in case of emergencies.
				

THREE POINTS

Three Points



The Advantages of our Towable Boom Lift

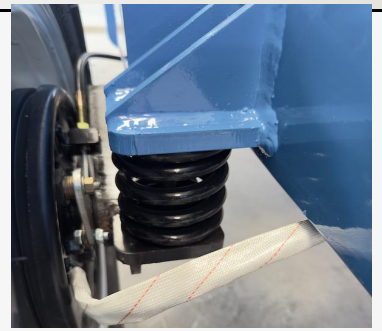Basket Control Lever – Adjusts basket balance and rotation.	Foot Pedal Safety Switch – Machine operates only when pressed and controlled simultaneously, ensuring safety.	Torsion Axle – Provides stability and excellent adaptability to road conditions.	Optional: Hydraulic Support for Auxiliary Walking Friction Wheel	Tires: 225/70R-16C Pneumatic Tires – Ensures more stable driving.
				
Sealing Ring: Japan NOK – High-quality, durable sealing solution.	Optional: One-Touch Balance Control Box	Trailer Hitch: Universal Design – Compatible with various towing vehicles.	Optional: Rotating Basket	Rotary Support – Fully sealed, dust-proof rotation system.
				

THREE POINTS

Three Points

The Advantages of our Towable Boom Lift

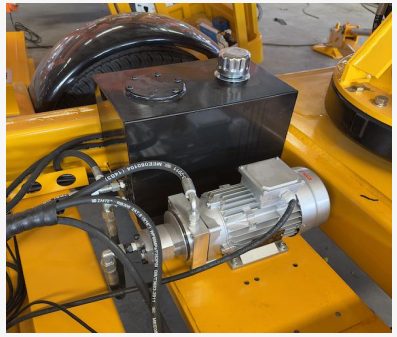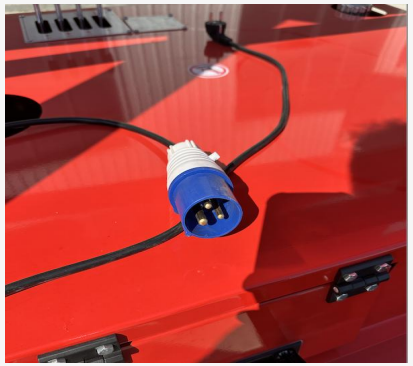Anshan Lisheng Pump Station (Sino-Italian Joint Venture)	Hydraulic Oil Tank Position	High-Density Rotary Support Pad	Fuel Filling Port Location
			
Joystick-Controlled Support Legs	Adjustable Support Leg Pads – Flexible positioning for stability.	Support Leg Hydraulic Valve	AC Model Charging Plug
			

THREE POINTS


Three Points

Factory Workshop Photos







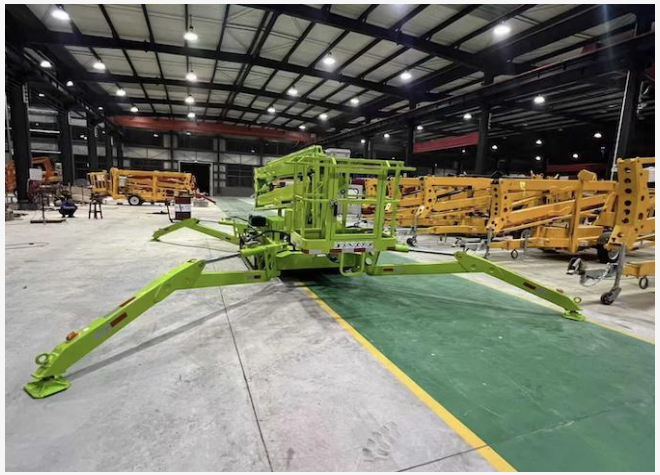







THREE POINTS

Three Points


Delivery （20'/40'Container Loading Quantity 1set/3sets）



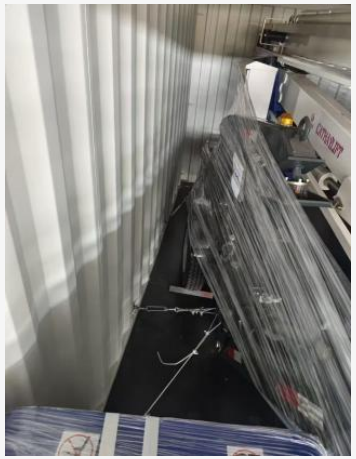

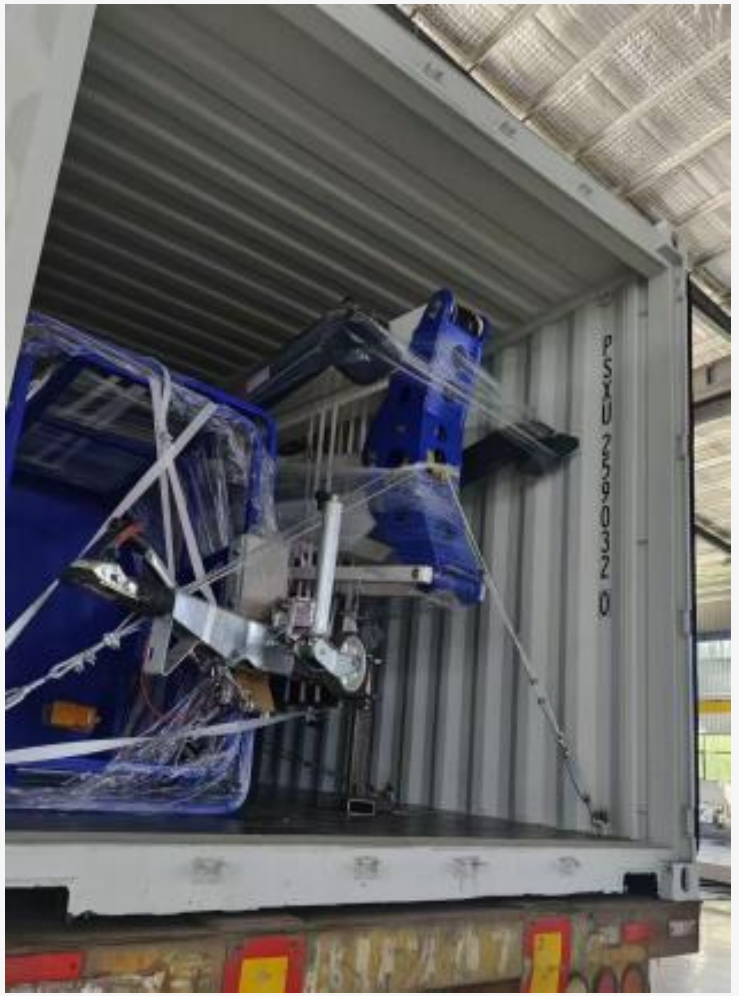



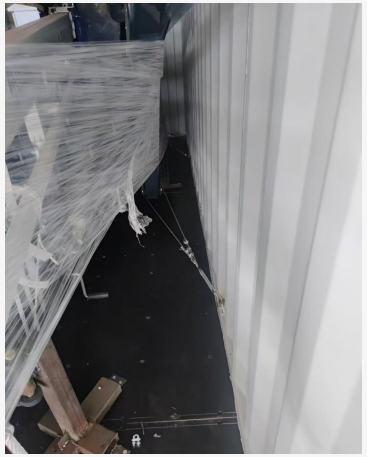

THREE POINTS


Three Points

Specification


	10m	12m	12m	14m	16m	18m	20m
Working height	12	14	14	16	18	20	22
Lifting height	10	12	12	14	16	18	20
Load capacity	200kg	200kg	200kg	200kg	200kg	200kg	200kg
Working radius	5.8m	7.5m	6.5m	8.5m	10.5m	12m	11m
Rotation range	359°/360°						
Platform size	0.9mx0.7mx1.1m						
Folding length	5.2*1.7*2.1	4.7-5.8	6200	5500-6600	5650-6750	5500	6500
Folding width	1.7	1.7	1.7m	1.7m	1.7m	1.7m	1.8m
Folding height	2.1	2.1	2.2m	2.2m	2.25m	2.25m	2.25m
Net Weight	1900kg	1950kg	1950kg	2300kg	2600kg	3300kg	3800kg
Power options (Single power or dual power)	AC 220V2.2KW/ diesel / gasoline / battery						
Electronic components	Schneider, Omron, etc						
Sealing ring	NOK(Japan)						
Control mode	UP-down control, controllable speed, stepless adjustment						
Color	Customized						
Tire	70R15c/225					225/70R-16C	225/70R-16C
Inertia braking device	AL-KO(German)						
Remarks: When in the combination of battery + diesel/gasoline, use electricity when there is power supply, and use fuel when there is no electricity power.							

THREE POINTS


Three Points

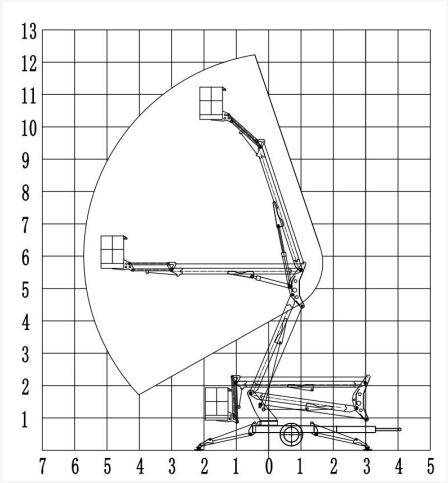


10M

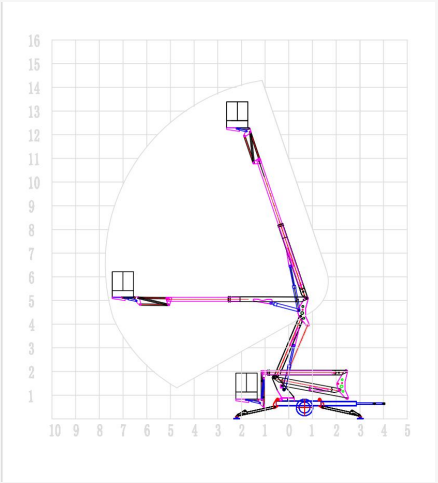


12A

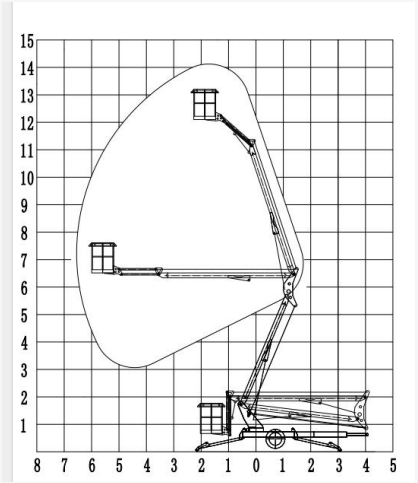


12M

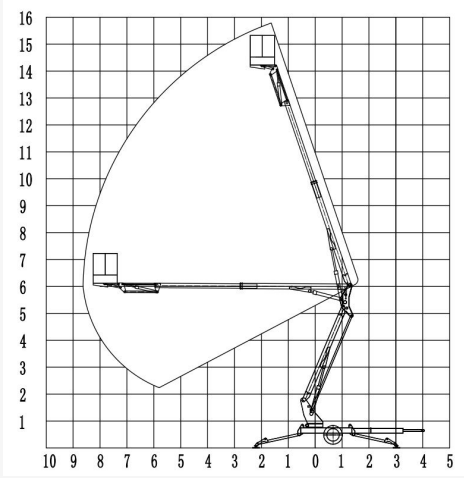


14M

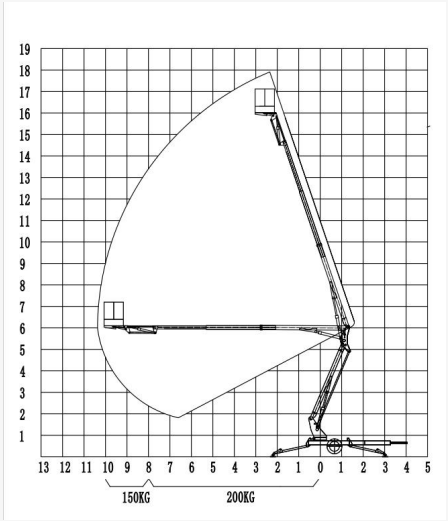

16M

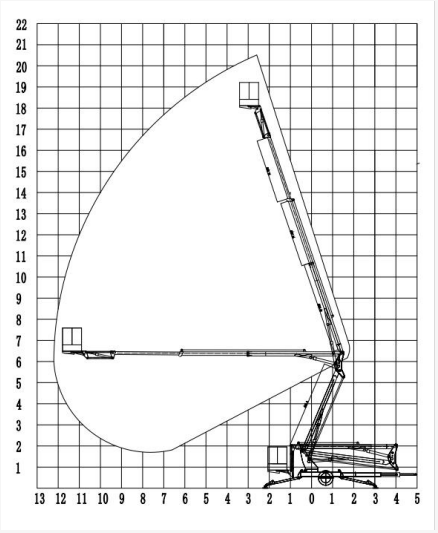

18M

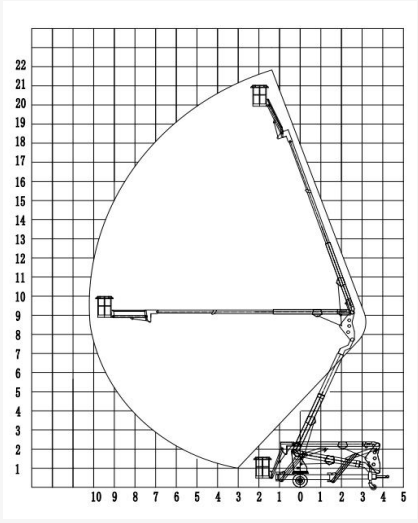

20M

Working Radius Range
Example Illustration

THREE POINTS

Features

01 Optimally designed, safe&reliable, wide range of applications..

1. Multi power for choice, such as AC,DC, AC&DC, Diesel, Gas and so on.
2. Waterproof design for electrical box, control panel, and diesel engine, motor and battery cover.
3. With maintenance hole, which is convenient in daily maintenance
4. Easy operation interface and specific control system, operators can easily master the operation methods of the equipment and achieve precise action control.
5. An extensive operation range and precise positioning, accelerates the work progress.
6. Featuring a compact size and excellent steering performance, it can easily pass through narrow passages and doorways



02 Main components are adopted well - known brands to ensure good performance.

1. Germany ALKO, Schneider, Omron, etc
2. Materials for the main body structure are selected from well - known domestic brands.



03 Complete range of specifications and models, and also customize according to customers' special requirements.

1. Working height
2. Color
3. Power type




Three Points

After - Sales Service

Responsive Service

Prompt response: 24-hour for general inquiries, 1-hour phone response for emergencies.

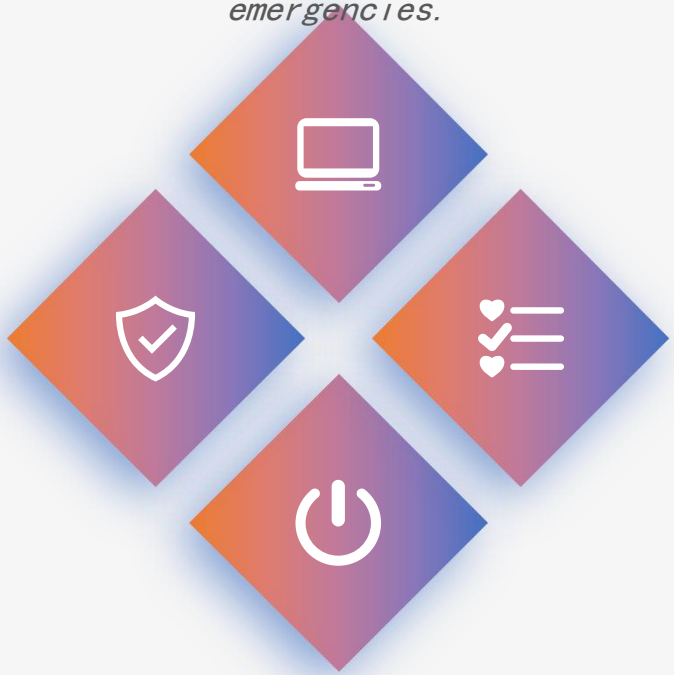

Warranty Clarity

We provide 10 years warranty for main structure, and 1 year warranty for parts, since the goods reach user's port.

Maintenance Support

Certified team, clear process, remote assistance for efficient fault repair.

Spare Parts Assurance

Ample stock of common parts, international - standard quality, custom - part availability.

THREE POINTS