Three Points



Innovative Ramps

Unleash Loading Efficiency with Our Mobile and Fixed Ramps


www.threepointslift.com

Three Points

Fixed Dock Ramp-Usage Scenes





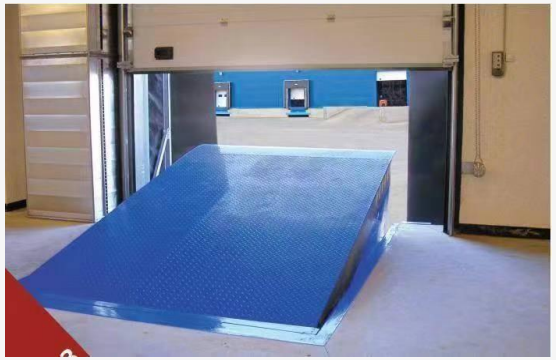







www.threepointslift.com

Three Points

Fixed Dock RampIn - Depth Configuration Breakdown



Specification	Model 1 (8T)	Model 2 (8T)	Model 3 (10T)	Model 4 (10T)	Model 5 (12T & Custom)	Model 6 (15T Custom MAX 40T
Overall Dimensions (mm)	2000×2000 / 2500×2500	3000×2000	2000×2000	2500×2000 / 3000×2000	2500×2000	2500×2000
Main Beam	60×120×3mm (8 pcs Rectangular Pipe)	80×160×3mm (4 pcs Rectangular Pipe) + 60×120×3mm (4 pcs Rectangular Pipe)	80×160×3mm (4 pcs Rectangular Pipe) + 60×120×3mm (4 pcs Rectangular Pipe)	80×160×3mm (8 pcs Rectangular Pipe)	80×160×4mm (8 pcs Rectangular Pipe)	80×160×4mm (8 pcs Rectangular Pipe)
Base Frame	Front: 50×100×3mm / 80×4mm Manganese Steel Rectangular Pipe, Mixed Frame	Front: 50×100×3mm / 80×4mm Manganese Steel Rectangular Pipe, Mixed Frame	Front: 50×100×3mm / 80×4mm Manganese Steel Rectangular Pipe, Mixed Frame	Front: 50×100×3mm / 80×4mm Manganese Steel Rectangular Pipe, Mixed Frame	Front: 60×120×3mm / 80×4mm Manganese Steel Rectangular Pipe, Mixed Frame	Front: 60×120×3mm / 80×4mm Manganese Steel Rectangular Pipe, Mixed Frame
Rear Frame	80×80×4mm	80×80×4mm	80×80×4mm	80×80×4mm	60×120×4mm	60×120×4mm
Pillars	70×70×3mm (6 pcs) + 80×80 Angle Steel	70×70×3mm (6 pcs) + 80×80 Angle Steel	70×70×3mm (6 pcs) + 80×80 Angle Steel	70×70×3mm (6 pcs) + 80×80 Angle Steel	60×120×4mm (6 pcs) + 80×80 Angle Steel	60×120×4mm (6 pcs) + 100×100 Angle Steel
Transport Dimensions (mm)	2000×2000×600	3000×2000×600	2000×2000×600	2500×2000×600	2500×2000×600	2500×2000×600

1.Power Supply & Motor
※Power Supply: 380V external power source (customizable)
※Motor Power: 1.1kW
※Hydraulic System Origin: Domestic
※Main Sealing Parts Origin: Germany/Japan
※Electrical System: Delixi

※Control Method: Fully electric button control
2. Surface Treatment
※Surface Treatment: Spray painting
3. Installation
※Installation Method: Pit-mounted
4. Collision Blocks
※Standard Collision Blocks: Two sets (300×200×100mm)


www.threepointslift.com

Three Points

Fixed Dock RampIn - Details






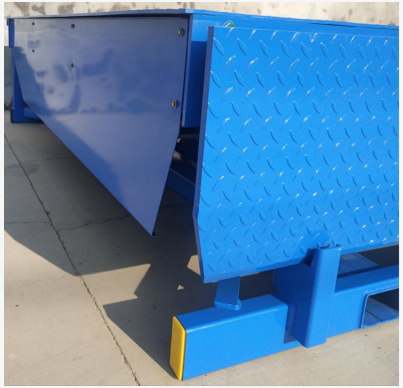






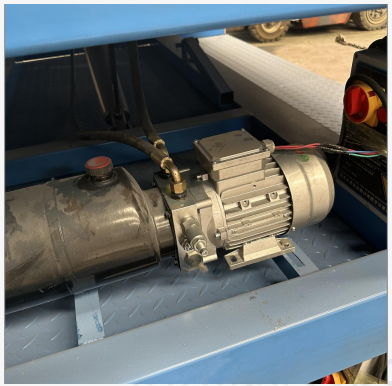

pointslift.com

Three Points

Foundation pit drawing of fixed dock ramp

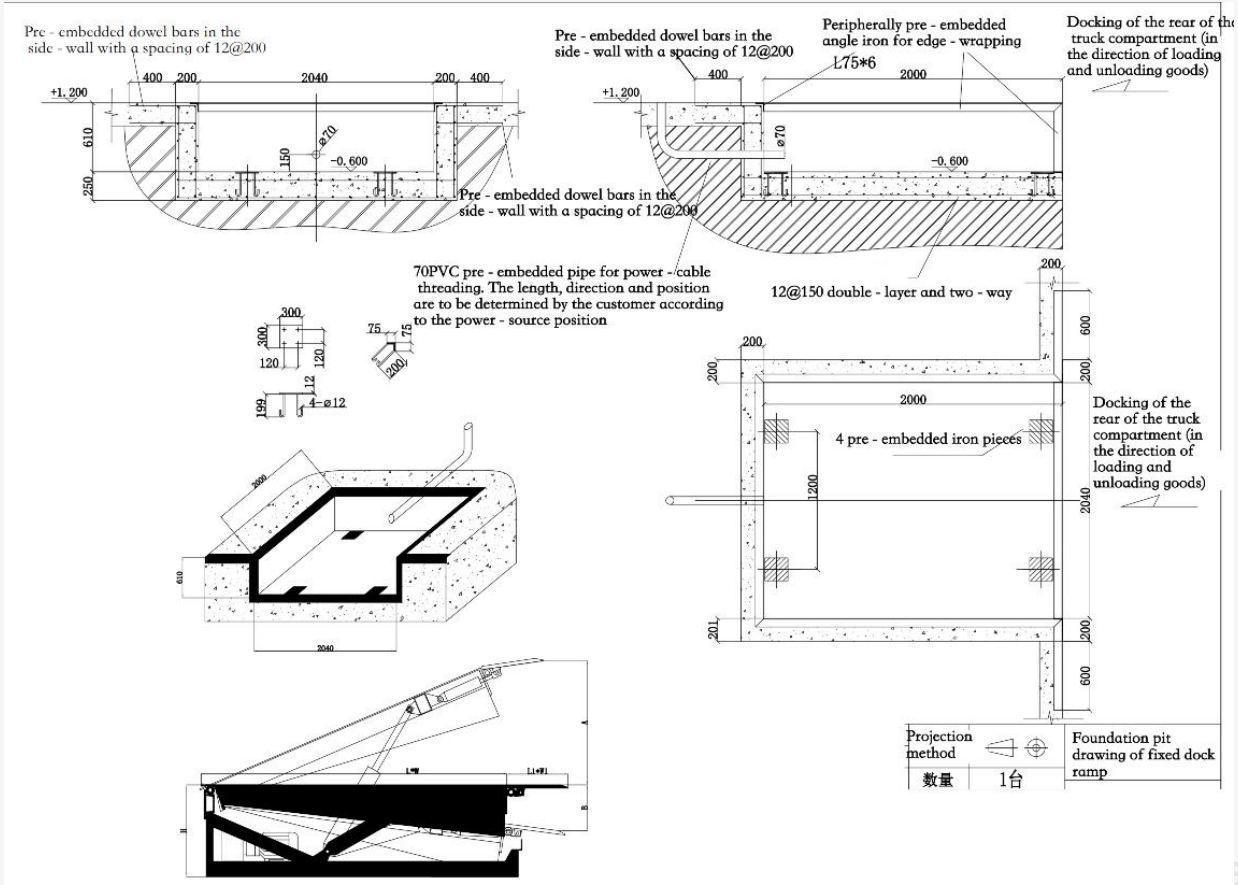

www.threepointslift.com

Three Points

Construction site of the pit










www.threepointslift.com


Three Points

Usage steps

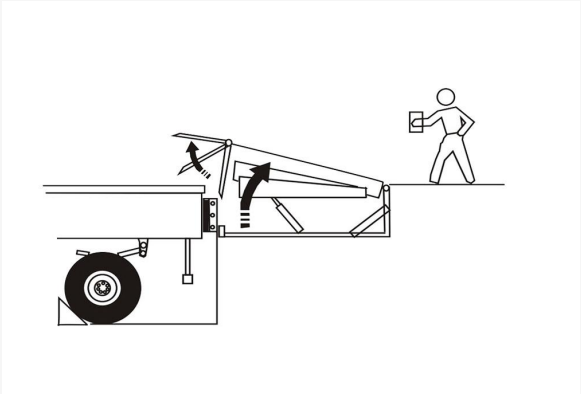

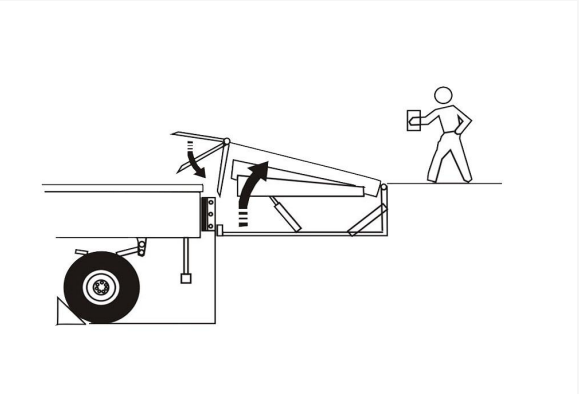

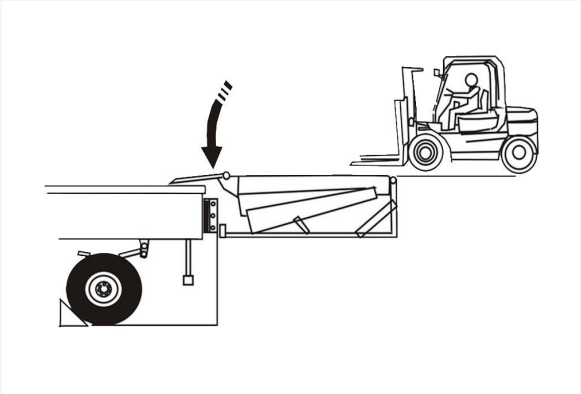

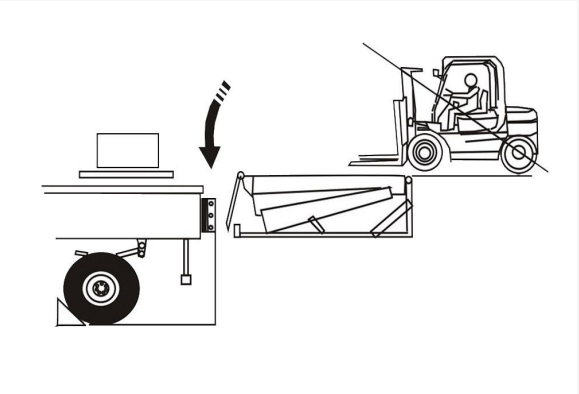

www.threepointslift.com